

TECHNICAL Overview

Benefits of Pre-framed panels for fast installation

Duct+ panel systems offer fast, simple and accurate installation. Panels are pre-fitted to factory constructed sub-frames to minimise site time whilst offering consistent panel alignment. Configured to suit any choice of sanitaryware and brassware.

SPECIFICATION OPTIONS

PERFORMANCE

HPL - for light to medium use, dry areas
SGL - for all types of use including high traffic and wet areas

COLOURS


from Dunhams Colour Selector

WE SUPPLY

Factory constructed birch ply subframe
Access Panels pre-fitted to sub-frames
Shadow/Flashgap panels
Laminated plinth
Fixings

PANEL OPTIONS

Lift-Off
Push-Fit
Hinged/Lockable

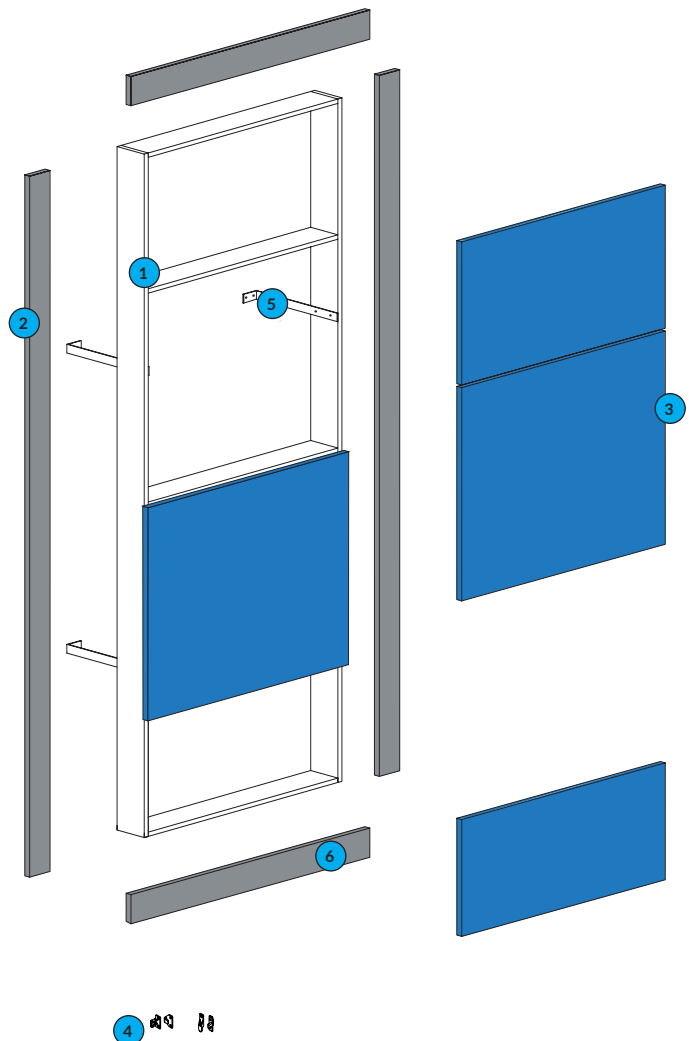

1 SUB-FRAMES

Factory assembled rigid birch ply sub-frame

2 SHADOWS

Supplied pre-sized for fast, accurate install

3 ACCESS PANELS

Factory fitted access panel configured to suit sanitaryware and brassware requirements

4 FITTINGS

Lift-off or push-fit secret Keku clip or hinged, lockable panel fittings

5 FRAMES TIES

High strength steel straps with pre-drilled fixing points

6 PLINTH

Matchig laminate faced birch ply