

# TECHNICAL Overview

## Pre-framed panels for fast installation

Duct+ panel systems offer fast, simple and accurate installation. Panels are pre-fitted to factory constructed sub-frames to minimise site time whilst offering consistent panel alignment. Configured to suit any choice of sanitaryware and brassware.

### SPECIFICATION OPTIONS

#### PERFORMANCE

HPL - for light to medium use, dry areas  
SGL - for all types of use including high traffic and wet areas

#### COLOURS


from Dunhams Colour Selector

#### WE SUPPLY

Factory constructed birch ply subframe  
Access Panels pre-fitted to sub-frames  
Shadow/Flashgap panels  
Laminated plinth  
Fixings

#### PANEL OPTIONS

Lift-Off  
Push-Fit  
Hinged/Lockable

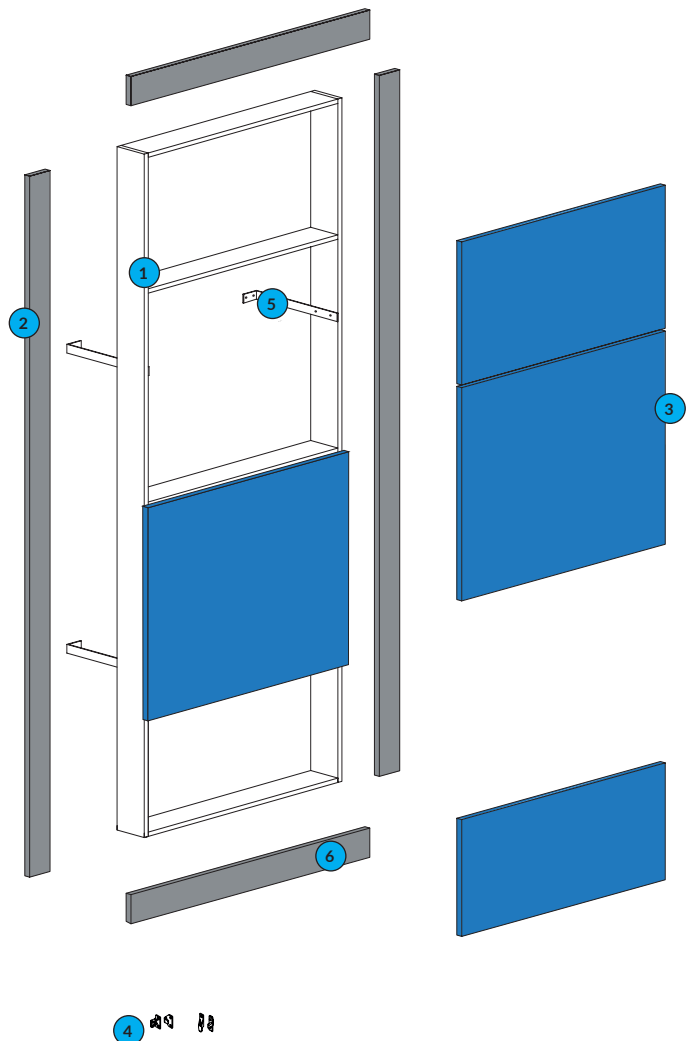

#### 1 SUB-FRAMES

Factory assembled rigid birch ply sub-frame

#### 2 SHADOWS

Supplied pre-sized for fast, accurate install

#### 3 ACCESS PANELS

Factory fitted access panel configured to suit sanitaryware and brassware requirements

#### 4 FITTINGS

Lift-off or push-fit secret Keku clip or hinged, lockable panel fittings

#### 5 FRAMES TIES

High strength steel straps with pre-drilled fixing points

#### 6 PLINTH

Matchig laminate faced birch ply