GEO DUAL FLUSH

Chrome

Applications

Designed for use with Dudley concealed cisterns and Illision A and V frames.

Water Saving

~ Dualflush operation provides reduced flush for enhanced water saving

Features

~ Dualflush

~ 73.5mm diameter pushbutton

~ Chrome plated finish

~ Smooth pneumatic operation

~ Can be positioned up to 250mm from from the cistern

Dimensional Data

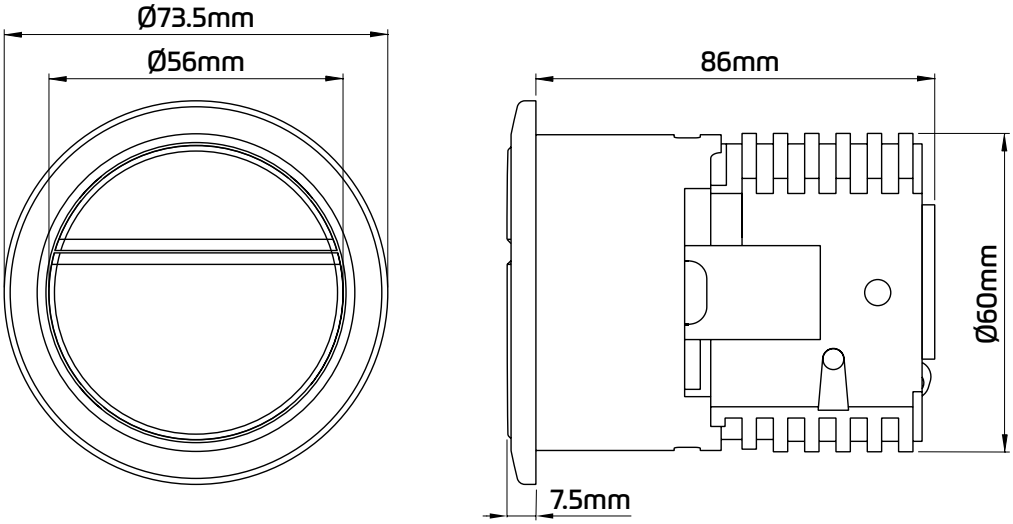

Technical Data

Wall Thickness	12-32mm
Installation Aperture	Ø62-65mm hole
Fixing Type	Locking Collet (Supplied)
Button Operation	Pneumatic
Flush Option	Dual Flush